


3-4 (oil-lubricated)

Voltage	V	100	100	120	200	200	230	230				
Frequency	Hz	50	60	60	50	60	50	60				
Motor	HP	0.20	0.20	0.20	0.18	0.18	0.18	0.18				
	kW	0.15	0.15	0.15	0.13	0.13	0.13	0.13				
Displacement	l/min	17	20	20	17	20	17	20				
	CFM	0.60	0.71	0.71	0.60	0.71	0.60	0.71				
FAD @ 8 bar	l/min	11	13	13	11	13	11	13				
	CFM	0.39	0.46	0.46	0.39	0.46	0.39	0.46				
Max. pressure ¹⁾	bar	8	8	8	8	8	8	8				
	psi	120	120	120	120	120	120	120				
Max. current	A	2.8	2.7	2.4	0.9	0.9	0.9	0.9				
Tank size	litres	4	4	4	4	4	4	4				
	gallon	1.1	1.1	1.1	1.1	1.1	1.1	1.1				
Weight	kg	18	18	18	18	18	18	18				
	lbs	40	40	40	40	40	40	40				
Noise level	dB(A)/1m	35	35	35	35	35	35	35				
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes				
Duty cycle		50%	50%	50%	50%	50%	50%	50%				

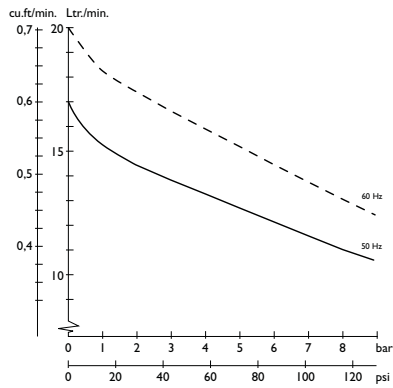

Dimensions (l x w x h)
382 x 300 x 334 mm / 15 x 11 6/8 x 13 1/8 inch

¹⁾ Higher pressure available upon request

Technical modifications reserved



JUN-AIR®

D, l ` H9 h m e n ? i t m ` h q c j
H i x d q u i s 9 v v v - i t m ` h q b n l